


BUSBAR HOLDERS

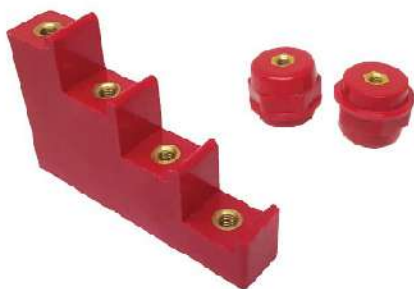

Available different type of busbar holders for different mounting systems.

RIPE - Hong Kong 

Ordering Information

Order No	Model No	Product	Height	Bolt Size	Busbar Size	No of Steps	Groove Wide
238 101	SM25 M6	Insulators - SM	25	6			
238 103	SM30 M8	Insulators - SM	30	8			
238 104	SM35 M8	Insulators - SM	35	8			
238 105	SM40 M8	Insulators - SM	40	8			
238 106	SM45 M8	Insulators - SM	45	8			
238 107	SM51 M8	Insulators - SM	51	8			
238 116	SM51 M10	Insulators - SM	51	10			
238 108	SM60 M8	Insulators - SM	60	8			
238 115	SM76 M8	Insulators - SM	76	8			
238 121	CT4 - 20	Step Insulator			20	4	
238 130	CT5 - 25	Step Insulator			25	5	
238 131	CT4 - 30	Step Insulator			30	4	
238 132	CT4 - 40	Step Insulator			40	4	
238 150	EL - 130	EL type busbar supports					7
238 153	EL - 270	EL type busbar supports					7 & 12
238 156	EL - 295	EL type busbar supports					6.3 & 11
238 159	EL - 409	EL type busbar supports					6.3 & 11

Technical Details

Operating Temperature - -40 ~ +140


Insert - Brass, Steel with Zn coating

Material - BMC (Bough Moulding Compound)

SMC (Sheet Moulding Compound)


Drawings -

Insulators - SM




■ **SM-20 外观及尺寸(mm)**

伸缩强度(LBS)	300
Tensile strength(LBS)	
耐压(KV)	5
Voltage withstand(KV)	
扭矩(FT LBS)	4
Torque strength(FT LBS)	
螺纹(mm)	5
screw(mm)	
螺纹深度(mm)	7
screw depth(mm)	




■ **SM-40 外观及尺寸(mm)**

伸缩强度(LBS)	650
Tensile strength(LBS)	
耐压(KV)	12
Voltage withstand(KV)	
扭矩(FT LBS)	12
Torque strength(FT LBS)	
螺纹(mm)	8
screw(mm)	
螺纹深度(mm)	11
screw depth(mm)	




■ **SM-25S 外观及尺寸(mm)**

伸缩强度(LBS)	400
Tensile strength(LBS)	
耐压(KV)	6
Voltage withstand(KV)	
扭矩(FT LBS)	5
Torque strength(FT LBS)	
螺纹(mm)	6
screw(mm)	
螺纹深度(mm)	8
screw depth(mm)	




■ **SM-45 外观及尺寸(mm)**

伸缩强度(LBS)	1000
Tensile strength(LBS)	
耐压(KV)	14
Voltage withstand(KV)	
扭矩(FT LBS)	20
Torque strength(FT LBS)	
螺纹(mm)	8
screw(mm)	
螺纹深度(mm)	11
screw depth(mm)	




■ **SM-25 外观及尺寸(mm)**

伸缩强度(LBS)	500
Tensile strength(LBS)	
耐压(KV)	6
Voltage withstand(KV)	
扭矩(FT LBS)	6
Torque strength(FT LBS)	
螺纹(mm)	6
screw(mm)	
螺纹深度(mm)	9
screw depth(mm)	




■ **SM-51 外观及尺寸(mm)**

伸缩强度(LBS)	1000
Tensile strength(LBS)	
耐压(KV)	15
Voltage withstand(KV)	
扭矩(FT LBS)	20
Torque strength(FT LBS)	
螺纹(mm)	8
screw(mm)	
螺纹深度(mm)	14
screw depth(mm)	




■ **SM-30 外观及尺寸(mm)**

伸缩强度(LBS)	550
Tensile strength(LBS)	
耐压(KV)	8
Voltage withstand(KV)	
扭矩(FT LBS)	8
Torque strength(FT LBS)	
螺纹(mm)	8
screw(mm)	
螺纹深度(mm)	11
screw depth(mm)	




■ **SM-60 外观及尺寸(mm)**

伸缩强度(LBS)	1200
Tensile strength(LBS)	
耐压(KV)	20
Voltage withstand(KV)	
扭矩(FT LBS)	35
Torque strength(FT LBS)	
螺纹(mm)	10
screw(mm)	
螺纹深度(mm)	15
screw depth(mm)	



■ **SM-35 外观及尺寸(mm)**




伸缩强度(LBS)	600
Tensile strength(LBS)	
耐压(KV)	10
Voltage withstand(KV)	
扭矩(FT LBS)	10
Torque strength(FT LBS)	
螺纹(mm)	8
screw(mm)	
螺纹深度(mm)	11
screw depth(mm)	



■ **SM-76 外观及尺寸(mm)**

伸缩强度(LBS)	1500
Tensile strength(LBS)	
耐压(KV)	25
Voltage withstand(KV)	
扭矩(FT LBS)	40
Torque strength(FT LBS)	
螺纹(mm)	10
screw(mm)	
螺纹深度(mm)	20
screw depth(mm)	

Step Insulator

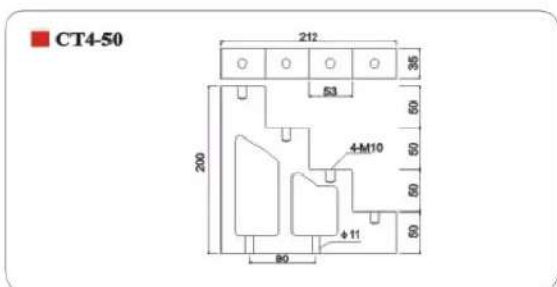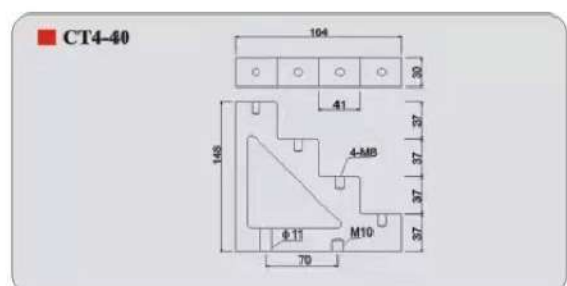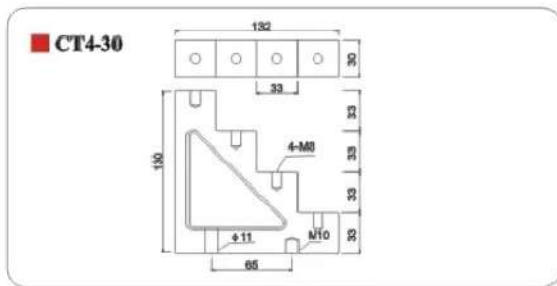

EL type busbar supports

