



Heat shrinkable sleeves are used to identify and insulation of the busbars.

Heat shrinkable sleeves are available in both new color code (Brown/Black/Grey/Blue) and old color code (Red/ Yellow/ Blue/ Black).

DIKEN - Taiwan 

Ordering Information

Order No	Model No	Product	Size	Colour	Busbar Size
210 307	HS - 40	Heat Shrinking Sleeve	40mm	Brown	1" x 1/4"
210 308	HS - 50	Heat Shrinking Sleeve	50mm	Brown	1 1/2" x 3/8"
210 309	HS - 60	Heat Shrinking Sleeve	60mm	Brown	1 1/2" x 1/4"
210 310	HS - 70	Heat Shrinking Sleeve	70mm	Brown	2" x 1/4"
210 312	HS - 100	Heat Shrinking Sleeve	100mm	Brown	3" x 1/4"
210 327	HS - 40	Heat Shrinking Sleeve	40mm	Black	1" x 1/4"
210 328	HS - 50	Heat Shrinking Sleeve	50mm	Black	1 1/2" x 3/8"
210 329	HS - 60	Heat Shrinking Sleeve	60mm	Black	1 1/2" x 1/4"
210 330	HS - 70	Heat Shrinking Sleeve	70mm	Black	2" x 1/4"
210 332	HS - 100	Heat Shrinking Sleeve	100mm	Black	3" x 1/4"
210 347	HS - 40	Heat Shrinking Sleeve	40mm	Grey	1" x 1/4"
210 348	HS - 50	Heat Shrinking Sleeve	50mm	Grey	1 1/2" x 3/8"
210 349	HS - 60	Heat Shrinking Sleeve	60mm	Grey	1 1/2" x 1/4"
210 350	HS - 70	Heat Shrinking Sleeve	70mm	Grey	2" x 1/4"
210 352	HS - 100	Heat Shrinking Sleeve	100mm	Grey	3" x 1/4"
210 367	HS - 40	Heat Shrinking Sleeve	40mm	Blue	1" x 1/4"
210 368	HS - 50	Heat Shrinking Sleeve	50mm	Blue	1 1/2" x 3/8"
210 369	HS - 60	Heat Shrinking Sleeve	60mm	Blue	1 1/2" x 1/4"
210 370	HS - 70	Heat Shrinking Sleeve	70mm	Blue	2" x 1/4"
210 372	HS - 100	Heat Shrinking Sleeve	100mm	Blue	3" x 1/4"


210 387	HS - 40	Heat Shrinking Sleeve	40mm	Green	1" x 1/4"
210 388	HS - 50	Heat Shrinking Sleeve	50mm	Green	1 1/2" x 3/8"
210 389	HS - 60	Heat Shrinking Sleeve	60mm	Green	1 1/2" x 1/4"
210 390	HS - 70	Heat Shrinking Sleeve	70mm	Green	2" x 1/4"
210 392	HS - 100	Heat Shrinking Sleeve	100mm	Green	3" x 1/4"
210 407	HS - 40	Heat Shrinking Sleeve	40mm	Red	1" x 1/4"
210 408	HS - 50	Heat Shrinking Sleeve	50mm	Red	1 1/2" x 3/8"
210 409	HS - 60	Heat Shrinking Sleeve	60mm	Red	1 1/2" x 1/4"
210 410	HS - 70	Heat Shrinking Sleeve	70mm	Red	2" x 1/4"
210 410	HS - 100	Heat Shrinking Sleeve	100mm	Red	3" x 1/4"
210 427	HS - 40	Heat Shrinking Sleeve	40mm	Yellow	1" x 1/4"
210 429	HS - 60	Heat Shrinking Sleeve	60mm	Yellow	1 1/2" x 1/4"
210 430	HS - 70	Heat Shrinking Sleeve	70mm	Yellow	2" x 1/4"
210 432	HS - 100	Heat Shrinking Sleeve	100mm	Yellow	3" x 1/4"

Technical Details

Material: Rigid Shrinkable PVC

Used for color distinction and insulation of busbar in control panel. To be shrunk by blower or hot water.

Maximum service temp: 80°C

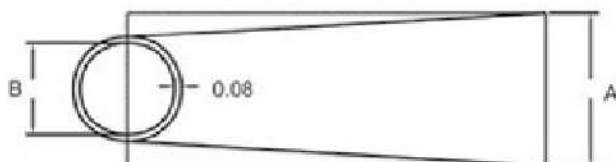

Model No.	Lay Flat ØA	Convert To ØB	Shrinkable Range
HS - 40	40	25	22.0~22.0
HS - 50	50	32	28.0~28.0
HS - 60	60	38	33.0~33.0
HS - 70	70	44	37.0~37.0
HS - 100	100	63	55.0~55.0