


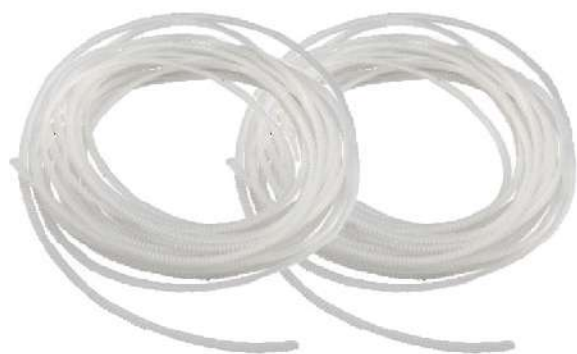

Movable bushings are used to protect the cables from sharp edges and can fix in any shape.

DIKEN - Taiwan 

Ordering Information

Order No	Model No	Product	T	Max. Chasis Thickness
210 630	MB - 010	Movable bushings	1.0	1.0
210 631	MB - 016	Movable bushings	1.6	1.0 - 1.6
210 632	MB - 020	Movable bushings	2.0	1.6 - 2.0
210 633	MB - 024	Movable bushings	2.4	2.0 - 2.4
210 634	MB - 032	Movable bushings	3.2	2.4 - 3.2
210 635	MB - 045	Movable bushings	4.5	3.2 - 4.5

Technical Details

Material: PE, NYLON (NATURAL color). Nylon product has more flexibility and better adhesion.

- Usage: Cut to fit any hole sizes for cords, wires, cables protection against damage from sharp panel edges.
- Function: Wires and cables protection and insulation.
- Advantage: Flexible, high adhesion, smooth surface.

Part No.	T	Max. chassis Thickness	Material
MB - 010	1.0	1.0	PE
MB - 012	1.2	1.0 - 1.2	
MB - 016	1.6	1.0 - 1.6	
MB - 020	2.0	1.6 - 2.0	
MB - 024	2.4	2.0 - 2.4	
MB - 032	3.2	2.4 - 3.2	
MB - 045	4.5	3.2 - 4.5	